




型号 / Model :
TW12/15JB-070E
电动托盘搬运车
Electric pallet truck

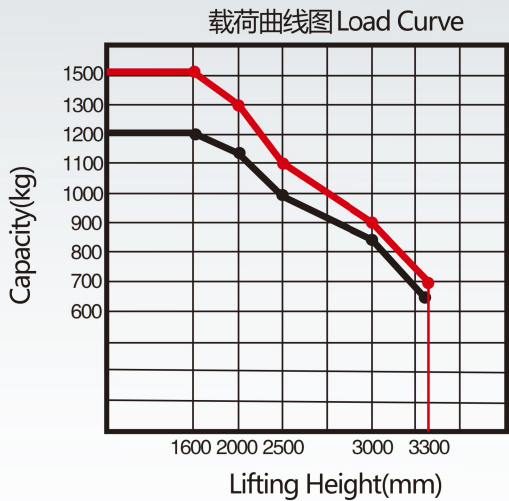

TW12JB-070E TW15JB-070E

配置及性能:

- 1.他励驱动电机,爬坡能力强;
- 2.高强度货叉;
- 3.标配内置充电机;
- 4.起升自动电限位,延长电机和电池寿命;

安全:

- 1.驱动无级调速,安全,静音;
- 2.控制器多重自动保护系统;
- 3.紧急反向装置/紧急制动开关。

Configuration and performance:

- 1.Separately excited motor, Strong climbing ability
- 2.High strength forks.
- 3.Built-in charger is standard.
- 4.Automatic lifting limit, Motor and battery life extension.

Safety:

- 1.Stepless speed control system, safe and quiet.
- 2.Controller with Multiple automatic protection.
- 3.Emergency reversing device / Emergency brake switch.

特性 Feature					
型号 Model		TW12JB-070E		TW15JB-070E	
操作类型 Operating type		步行式 Waikle			
额定载重 Load capacity	kg	1200		1500	
载荷中心距 Load center	mm	600			
轴距 Wheel base	mm	1150		1166	
自重（包含蓄电池）Service weight with battery	kg	616		676	
控制器型号 Controller		Chinese brand(可选/Option:CURTIS)			
车轮 Wheels					
轮子类型(前/后) Wheels type		PU			
驱动轮/平衡轮/承重轮 数量 Wheel quantity Driving wheel/Balance wheel/Bearing wheel		1/1/4			
驱动轮尺寸 Driving wheel size	mm	Φ 252x60			
平衡轮尺寸 Bearing wheel size	mm	Φ 115x55			
承重轮尺寸 Bearing wheel size	mm	Φ 84x70			
尺寸 Dimension					
标准门架起升高度 Standard lift height	mm	2000/2500/3000/3300			
门架作业时整车最大高度 Max extend height	mm	2515/3015/3515/3815			
门架缩回时整车静态高度 Mast lowered height	mm	1560/1810/2060/2210			
货叉最低高度 Lowered fork height	mm	90			
整车全长 Overall length	mm	1733		1764	
车体宽度 Overall width	mm	790			
标准货叉规格(长/宽/厚) Fork size(length/width/thickness)	mm	1150/185/55			
货叉外宽 Outside width between forks	mm	550/600/650/685			
最小转弯半径 Min.Turning radius	mm	1350		1365	
最小直角堆垛通道宽度,踏板收起/放下(托盘800x1200, 1200沿货叉放置) Min.Aisle width for pallets 800x1200	mm	1914		1930	
最小直角堆垛通道宽度,踏板收起/放下(托盘1000x1200, 1200沿货叉放置) Min.Aisle width for pallets 1000x1200	mm	1955		1970	
性能 Performance					
最大行驶速度, 满载/空载 Travel speed,laden/unladen	km/h	3.6/4.3		3.5/4.0	
最大起升速度, 满载/空载 Lift speed,laden/unladen	mm/s	120/200			
最大下降速度, 满载/空载 Lowering speed,laden/unladen	mm/s	100/90		105/102	
爬坡度, 满载/空载 Gradeability,laden/unladen	%	5/7			
电气配置 Electrical configuration					
驱动电机/起升电机 Drive motor/Lift motor	KW	DC0.63/DC2.0		DC0.63/DC2.2	
蓄电池电压 Battery voltage	V	24			
蓄电池容量 Battery capacity	Ah	85(选配100)			
蓄电池重量 Battery weight	Kg	48			
充电器规格 Charger specification		24V/10A			
其他 Others					
噪音等级 Sound level	dB(A)	≤69			
转向类型 Steering type		机械转向 Mechanical			

*本公司保留更改产品设计和规格的权力，恕不另行通知。

TEU reserves the right to make any changes without notice concerning design and specifications detailed in this brochure.

