




型号 / Model :
TS16/20GA-D930
TS16GA-950/350
电动托盘堆垛车/ElectricStacker

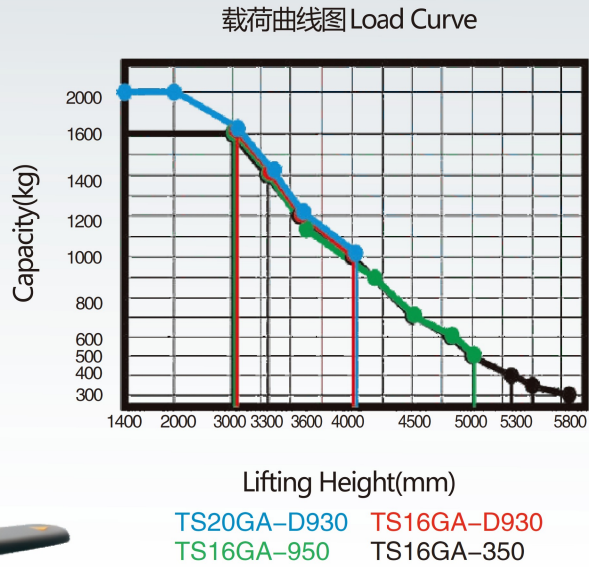

配置及性能:

- 1.电子助力转向,轻便、静音;
- 2.双路下降电磁阀,三种下降速度模式
- 3.交流驱动电机,无碳刷,免维护;
- 4.起升自动限位,长寿命接近开关;
- 5.驱动单元专利设计浮动增力机构;

安全:

- 1.转弯自动减速功能,更安全;
- 2.货叉高货位,车辆行驶自动降速;
- 3.驱动无级调速,安全,静音;
- 4.控制器多重自动保护系统;
- 5.紧急反向装置/紧急制动开关。

Configuration and performance:

- 1.Electronic power steering system , light and low noise.
- 2.Two-way magnetic valve, three drop speed mode .
- 3.AC driving motor, without carbon brush and free maintenance.
- 4.Automatic lifting limit , proximity switch , long life.
- 5.Drive unit floating bodies with patent design.

Safety:

- 1.Curve automatic deceleration function, more safe.
- 2.Goods high position, vehicle automatic reduction.
- 3.Stepless speed control system, safe and quiet.
- 4.Controller with Multiple automatic protection.
- 5.Emergency reversing device/Emergency brake switch.

特性 Feature					
型号 Model		TS16GA	TS16GA	TS16GA	TS20GA
配置号 Configuration NO.		D930	950	350	D930
门架类型 Mast type		两级标准2-stage	三级全自由 Full free 3-stage		两级标准2-stage
操作类型 Operating type		步行式/乘驾式 Walkie/Stand On			
额定载重 Load capacity	kg	1600			2000
载荷中心距 Load center	mm	600			
轴距 Wheel base	mm	1325	1375		1325
车轮 Wheels					
轮子类型(前/后) Wheels type		PU			
驱动轮/平衡轮/承重轮 数量 Wheel quantity Driving wheel/Balance wheel/Bearing wheel		1/2/4			
驱动轮尺寸 Driving wheel size	mm	Φ 248x75			
平衡轮尺寸 Bearing wheel size	mm	Φ 115x55			
承重轮尺寸 Bearing wheel size	mm	Φ 84x70			
尺寸 Dimension					
标准门架起升高度 Standard lift height	mm	1400/2000/2500/ 3000/3300/3600/4000	3700/3900/4200/ 4500/4700/5000	5300/5500/5800	1400/2000/2500/ 3000/3300/3600/4000
门架作业时整车最大高度 Max extend height	mm	1900/2500/3000/ 3500/3800/4100/4500	4200/4400/4700/ 5000/5200/5500	5800/6000/6300	1900/2500
门架缩回时整车静态高度 Mast lowered height	mm	1185/1535/1765/ 1980/2135/2335/2500	1800/1900/1985/ 2085/2135/2235	2520/2590/2690	1185/1535
自由提升高度 Free lifting height	mm	—	1335/1448/1520/ 1620/1670/1770	2074/2134/2234	—
货叉最低高度 Lowered fork height	mm	90			
标准货叉规格(长/宽/厚) Fork size(length/width/thickness)	mm	1150 (1220) /185/55			
整车全长 Overall length	mm	2050/2470	2105/2525		2050/2470
车体宽度 Overall width	mm	856	957		856
最小转弯半径 Min.Turning radius	mm	1580/1990	1595/2010		1580/1990
最小直角堆垛通道宽度,踏板收起/放下(托盘800x1200, 1200沿货叉放置)Min.Aisle width for pallets 800x1200	mm	2180/2580	2230/2625		2180/2580
最小直角堆垛通道宽度,踏板收起/放下(托盘1000x1200, 1200沿货叉放置)Min.Aisle width for pallets 1000x1200	mm	2210/2600	2260/2650		2210/2600
最小离地间隙 Min.ground clearance	mm	30			
性能 Performance					
最大行驶速度,满载/空载 Travel speed,laden/unladen	km/h	6/6			
最大起升速度,满载/空载 Lift speed, laden/unladen	mm/s	130/180			
最大下降速度,满载/空载 Lowering speed,laden/unladen	mm/s	100/200	100/160		100/200
爬坡度, 满载/ 空载 Gradeability,laden/unladen	%	6/8			
电气配置 Electrical configuration					
驱动电机/起升电机/转向电机 Drive motor /Lift motor/Steering motor	KW	AC 1.5 / DC 3 / DC 0.15			
蓄电池电压 Battery voltage	V	24			
蓄电池容量 Battery capacity	Ah	280(电池侧拉side-extraction battery)			
制动 Brake		电磁/再生 Electromagnetic/Regenerative			
控制器型号 Controller		ZAPI			
重量 Weight					
蓄电池重量 Battery weight	kg	235			
自重 (包含蓄电池) Service weight with battery	kg	1213	1585	1649	1213

车型Type	起升高度mm Lift height	门架类型 Mast type	叉腿外侧间距 mm Outside width between forks	叉腿内侧间距 mm Inside width between forks
TS16GA-D930	1400/2000/2500/3000/3300/3600/4000	两级标准/2-STAGE STD	550/600/650/685	180/230/280/315
TS16GA-950	3700/3900/4200/4500/4700/5000	三级全自由/FULLFREE 3-STAGE		
TS16GA-350	5300/5500/5800	三级全自由/FULLFREE 3-STAGE		
TS20GA-D930	1400/2000/2500/3000/3300/3600/4000	两级标准/2-STAGE STD	650/685	280/315
1、TS20GA系列, 起升高度在2m以内载荷2000kg		1、TS20GA series , lifting height<2000mm, load capacity is 2000kg.		
2、TS20GA系列, 货叉外侧间距必须≥650mm。		2、TS20GA series ,outside width between forks≥650mm.		

*本公司保留更改产品设计和规格的权力, 恕不另行通知。

TEU reserves the right to make any changes without notice concerning design and specifications detailed in this brochure.